

NEW PRODUCT




We Just Added More To Our Already Amazing Product Line,
Take A Look!


Filament Tape Industrial (FTI) Grade 147lb Tensile Strength

		FILAMENT TAPE (Industrial Grade) (FTI)			
Product Data Sheet				Effective 11/2017	
Product Description:					
A high tensile strength, high adhesion, rubber based, uni-directional, glass reinforced pressure sensitive tape designed for many demanding packaging applications.					
Item ID Numbers:					
FTI3912, FTI3918, FTI3924, FTI3948					
Nominal Values:					
Backing:		Biaxially-Oriented Glass Reinforced Polypropylene Film			
Adhesive:		Synthetic Rubber Resin			
Colors:		White			
Total Thickness:		4.8 MIL			
Peel Adhesion:		110 oz./in			
Tensile Strength:		148 lb./in			
Elongation:		5%			
<small>(Tolerance +/- 10%); We believe the statements and information contained herein are accurate but are to be used only as general guidelines and are not warrants or guarantees because of the variety of possible uses. THERE IS NOWARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. THE BUYER MUST TEST THE SUITABILITY FOR EACH INTENDED APPLICATION BEFORE USING. WRAPTITE WILL NOT BE LIABLE FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF ITS PRODUCTS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.</small>					
Wrap Tite, Inc. 6200 Cochran Rd. Solon, Ohio 44139 Toll Free: 888-WRAP TITE (972-7848) Fax: 440-349-5432 www.wraptite.com - info@wraptite.com					



Non Re-inforced Gum Tape

			
Product Data Sheet		Gum Tape(non-reinforced) Industrial Grade	
Effective 11/2017			
Product Description: Kraft carton sealing tape manufactured with water-activated adhesive. The product is Repulpable and recyclable. It is used for inner carton sealing or for lightweight cartons shipped in unitized loads or full pallets.			
Item ID Numbers: GTI72KA-IT			
Nominal Values:			
Adhesive:		# 410 Starch Based Adhesive	
Physical Properties:			
Caliper:		5.6 mils (0.14 mm)	
MD Tensile:		45 lbs./in (197 N / 25 mm)	
CD Tensile:		23 lbs./in (101 N / 25 mm)	
Adhesion (water at recommended 110°F/43°C)			
Fipago:		23	
2/0		42	
2/1		48	
5/0		82	
15/0		34	
McLaurin :		34	
<small>(Tolerance +/- 10%); We believe the statements and information contained herein are accurate but are to be used only as general guidelines and are not warrants or guarantees because of the variety of possible uses. THERE IS NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. THE BUYER MUST TEST THE SUITABILITY FOR EACH INTENDED APPLICATION BEFORE USING. WRAPTITE WILL NOT BE LIABLE FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF ITS PRODUCTS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES</small>			
Wrap Tite, Inc. 6200 Cochran Rd. Solon, Ohio 44139 Toll Free: 888-WRAP TITE (972-7848) Fax: 440-349-5432 www.wraptite.com – info@wraptite.com			

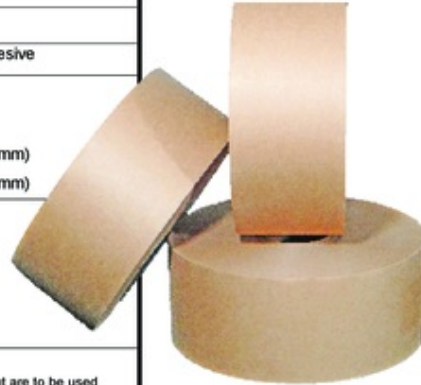

Call Your Representative To Place Your Order Today!

Click [HERE](#) to download Spec Sheets

Visit Our Website

